


BUSBARS



Model	Conductor	Nominal Current	Max. Voltage	Support Distance	Weight of Assembly
ODSLA100	GI	100	660V	1.5m	2.0
ODSLA160	GI	160		1.5m	2.2
ODSLA200	Aluminum	200		1.5m	2.8
ODSLA1250	Aluminum	250		1.5m	3.15
ODSLA1320	Aluminum	320		1.5m	4.8
ODSLA1500	Aluminum	500		1.8m	5.65
ODSLA1630	Aluminum	630		1.8m	6.9
ODSLA1800	Aluminum	800		1.8m	7.5
ODSLA11000	Aluminum	1000		1.8m	9.15

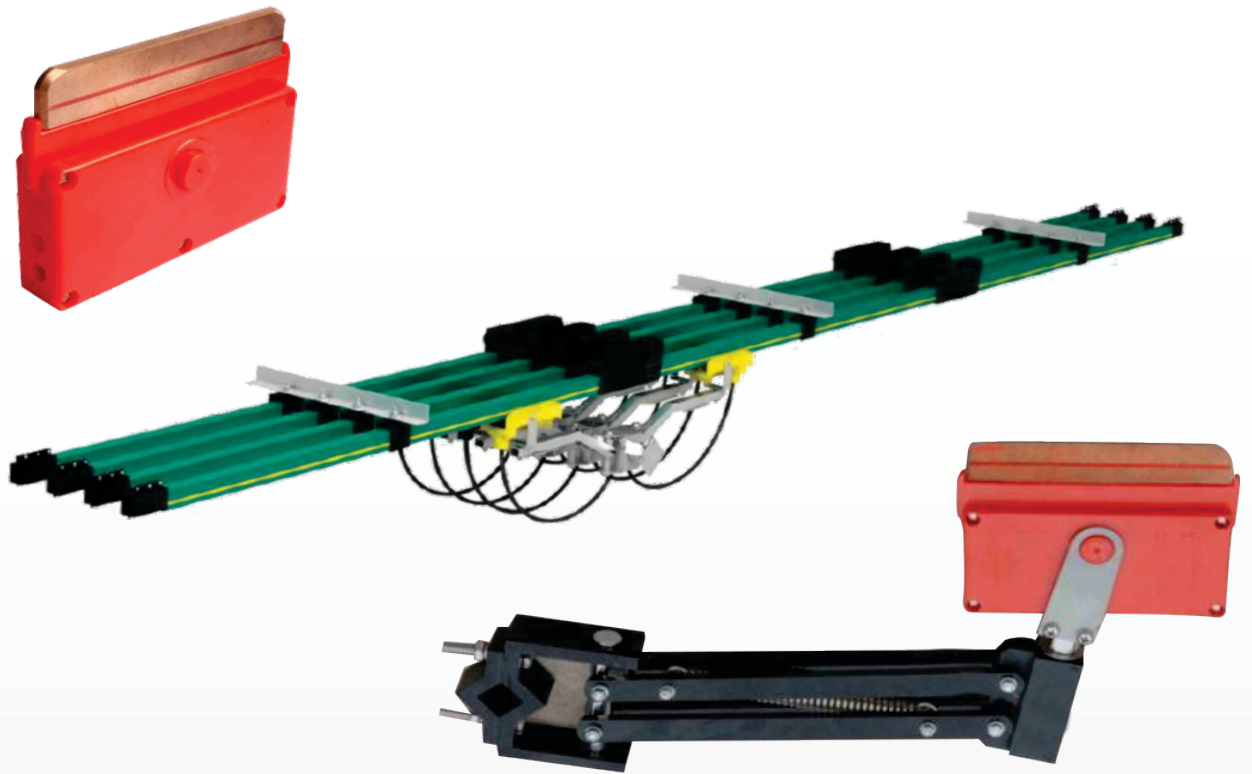